


Willow Creek Brickstone<sup>™</sup> Permeable Pavers Directly placed on grid welded to edging

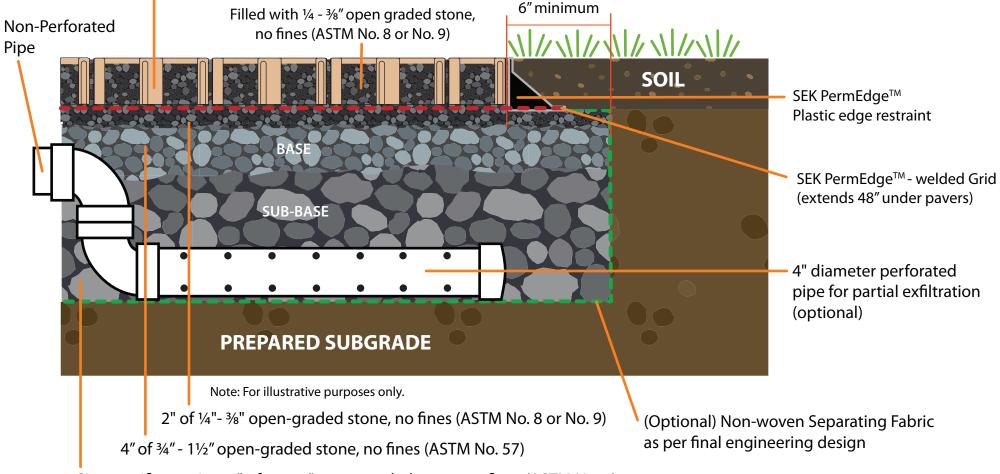

Site specific or min. 12" of  $1\frac{1}{2}$  - 3" open-graded stone, no fines (ASTM No. 2)

## Brickstone<sup>™</sup> Permeable Pavement System Residential Pedestrian and Vehicular Cross Section Using SEK PermEdge<sup>™</sup>